


Comelit 2603u Style Basic Universal

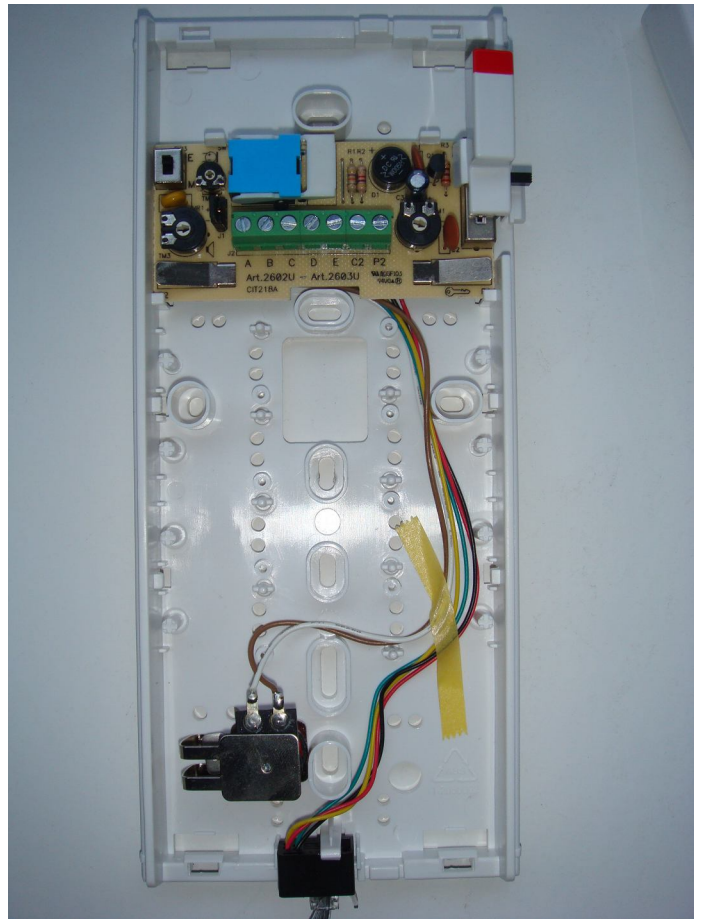

Terminals

| | |
|----------|---------------------------|
| A | Lock |
| B | Speech Out (Mic) |
| C | Common |
| D | Call (Electronic or Buzz) |
| E | Speech In (Speaker) |
| C2,P2 | Aux Button N/O |
| Sw | Call Type Selector |
| Trimmers | Mic & speaker adjust |
| Jumper | Configuration Jumper |

IMPORTANT NOTE :

1) Before replacing the handset make note of the wires to each terminal on the existing unit (an easy way is to cut each core off leaving a piece of the insulation in place with colour visible) twist unused cores together (so you know they are not used, do not short them out).

2) Some older systems will have cable with one coloured core and a solid white core in this case mark each core with a marker or tape.

3) Some systems may have loop on wiring, you will have 2 cables into your handset (make sure any joins remain, as these may be serving other flats on the system).


Compatibility Chart

| COMELIT ART. 2602U - ART. 2603U | A | B | C | D | E | E M | J1 |
|---------------------------------|----|-----|-------|----|------|--------|----|
| ACET | 5 | 10 | 2 | 9 | 7 | M | -V |
| ALCAD TEL-001 - TEL002 | 1 | 3 | 2 | 5 | 4 | E | -V |
| AMPER | D | A | C | E | B | M | -V |
| ATEA | 2 | 4 | 3 | 5 | 1 | M | -V |
| AUTA | 10 | 3 | 4 | 12 | 7 | M | -V |
| AUTA TF92 | 10 | 3 | 4 | 12 | 7 | E | -V |
| AUTELCO | P5 | a | 1 | 2 | b | M | -V |
| BELL SYSTEM TELEPHONE | Z | R | O | I | T | M | -V |
| BITRON | 9 | 2 | 6 | C7 | 1 | E | -V |
| BOGEN | T | 1 | 3 | 6 | 2 | M | -V |
| BPT | 9 | 9 | 5 | 7 | 8 | E | -V |
| BPT | 2 | 1 | 4 | 3 | 5 | M | -V |
| CENTRAMATIC | 4 | 2 | 1 | 5 | 3 | M | -V |
| CITESA | 1 | 4 | C | B | 3 | M | -V |
| CITVOX | 5 | 10 | 9 | T | 7 | M | -V |
| COFREL (LT TERRANEO) | T1 | 1 | 3 | 6 | 2 | M | -V |
| COFREL (LT TERRANEO) | 6 | 4 | 1 | 5 | 3 | E | -V |
| COFREL 600 (LT TERRANEO) | T | 1 | 3 | 6 | 2 | M | -V |
| COFREL 603 (LT TERRANEO) | T | 6 | 3 | 6 | 2 | M | -V |
| COMELIT VOX ART. 2100 | P1 | 3 | 4 | 1 | 2 | M | -V |
| COMELIT VOX ART. 2101 | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT VOX ART. 2102 | P1 | 3 | 4 | 1 | 2 | M | -V |
| COMELIT VOX ART. 2103 | P1 | 3 | 4 | 1 | 2 | M | -V |
| COMELIT VOX ART. 2104 | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT CIAO ART. 2300 | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT CIAO ART. 2301 | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT CIAO ART. 2302 | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT CIAO ART. 2304 | P1 | 3 | 4 | 1 | 2 | M | -V |
| COMELIT OKAY ART. 2402W | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT OKAY ART. 2404W | P1 | 3 | 4 | S | 2 | E | -V |
| COMELIT OKAY ART. 2405W | P1 | 3 | 4 | S | 2 | E | -V |
| ELBEX | | MIC | LOW | + | SPEC | M | -V |
| ELVOX | 2 | 6 | 9 | + | 4 | M | -V |
| ELVOX | 7 | 2 | 4 | 6 | 1 | M | -V |
| ELVOX 6200 | 7 | 2 | 3 | 6E | 1 | E | -V |
| ENTRA 97 | 1 | 2 | 3 | 5 | 6 | M | -V |
| ENTRYPHONE | 3 | P | F,B,G | 4 | L | M | -V |
| ERICSSON DEPN 40101 | 5 | 3 | 2 | 1 | 4 | M | -V |
| ERICSSON DEPN 60121 | 3 | 5 | 1 | 4 | 7 | M | -V |
| FARFISA | 5 | 1 | 3 | 6 | 2 | M | -V |
| FERMAX 2044 - 20440 - 2110 | 1 | 2 | 3 | 4 | 6 | E | +L |

| COMELIT ART. 2602U - ART. 2603U | A | B | C | D | E | E M | J1 |
|---------------------------------|----|----|-----|------|----|--------|----|
| FERMAX Gondola | 4 | 1 | 3 | V/5 | 2 | M | -V |
| FERMAX Repto TF-4 | P | A | C | E | B | M | -V |
| FRINGE | 2 | 3 | 1 | 4,* | 6 | ME | -V |
| GAME | P | 2 | 3 | Z | 1 | M | -V |
| GIRO | 2 | 3 | 1 | 4 | 6 | M | -V |
| GOLMAR | X | M | A | N | S | ME | -V |
| GOLMAR | C2 | 5 | 3 | 7 | 10 | E | -V |
| GOLMAR | 11 | 5 | 3 | 12 | 4 | M | -V |
| GOLMAR T-600 | T | 1 | 3 | 6 | 2 | M | -V |
| GOLAMR T810B | P1 | 5 | 3 | 7 | 10 | M | -V |
| GOLAMR T-2800 | 4 | 5 | 3 | 7 | 10 | M | -V |
| LT TERRANEO (COFREL) | T1 | 1 | 3 | 6 | 2 | M | -V |
| LT TERRANEO (COFREL) | 6 | 4 | 1 | 5 | 3 | E | -V |
| LT TERRANEO (COFREL) 600 | T | 1 | 3 | 6 | 2 | M | -V |
| LT TERRANEO (COFREL) 603 | T | 6 | 3 | 6 | 2 | M | -V |
| MM DI MARCHESI | 1 | 3 | 2 | 5 | 4 | M | -V |
| OSTELVI | 9 | 2 | 6 | 7 | 1 | M | -V |
| PORMAT | 4 | 3 | 2 | V | 1 | M | -V |
| RIPOLLES | 3 | 1 | 8 | 4 | 2 | M | -V |
| RITTO ELEGANT 40518 | 11 | 12 | 13 | 15 | 14 | E | -V |
| SAFNAT | 4 | 1 | 2 | V | 3 | M | -V |
| SELT | 5 | 1 | 3 | 6 | 2 | M | -V |
| SIEDLE HT611-01 | I | 12 | 9/C | 7 | 11 | M | -V |
| SPRINT | 4* | 1 | 3 | 6 | 2 | M | -V |
| STR NH200 | 1 | M | O | T | S | M | -V |
| STR NH205 | 1 | M | O | T | S | E | -V |
| TAGRA | 8 | 2 | 6 | 4 | 1 | M | -V |
| TEGUI GL | 3 | 4 | 2 | 1 | 5 | M | -V |
| TEGUI HORIZON | 3 | 4 | 2 | 1 | 5 | ME | -V |
| TELEVES | 4 | 2 | 3 | T | 1 | M | -V |
| TESLA DDZ 85 | 1 | 2 | 3 | 4 | 6 | M | -V |
| TESLA DDZ 93 | Z | 2 | 3 | 4 | 6 | M | -V |
| TUNE | 8 | 2 | 6 | 4 | 1 | M | -V |
| URMET 730/1 | 6 | 2 | 9 | 7 | 1 | M | -V |
| URMET DOMUS 1131 - 1132 - 1133 | 9 | 2 | 6 | CA | 1 | E | -V |
| URMET DOMUS 1130 | 9 | 2 | 10 | 7 | 1 | M | -V |
| URMET DOMUS 1134 | 9 | 2 | 6 | CA | 1 | E | -V |
| VIDEX | 5 | 1 | 3 | 4 | 2 | E | -V |
| VIDEX | 5 | 1 | 7 | 6 | 2 | M | -V |
| YUS PHONE | EL | T | - | B/PT | R | M | -V |

WIRING DIAGRAM

Comelit 2402W-2405W 1 Way 5 Wire

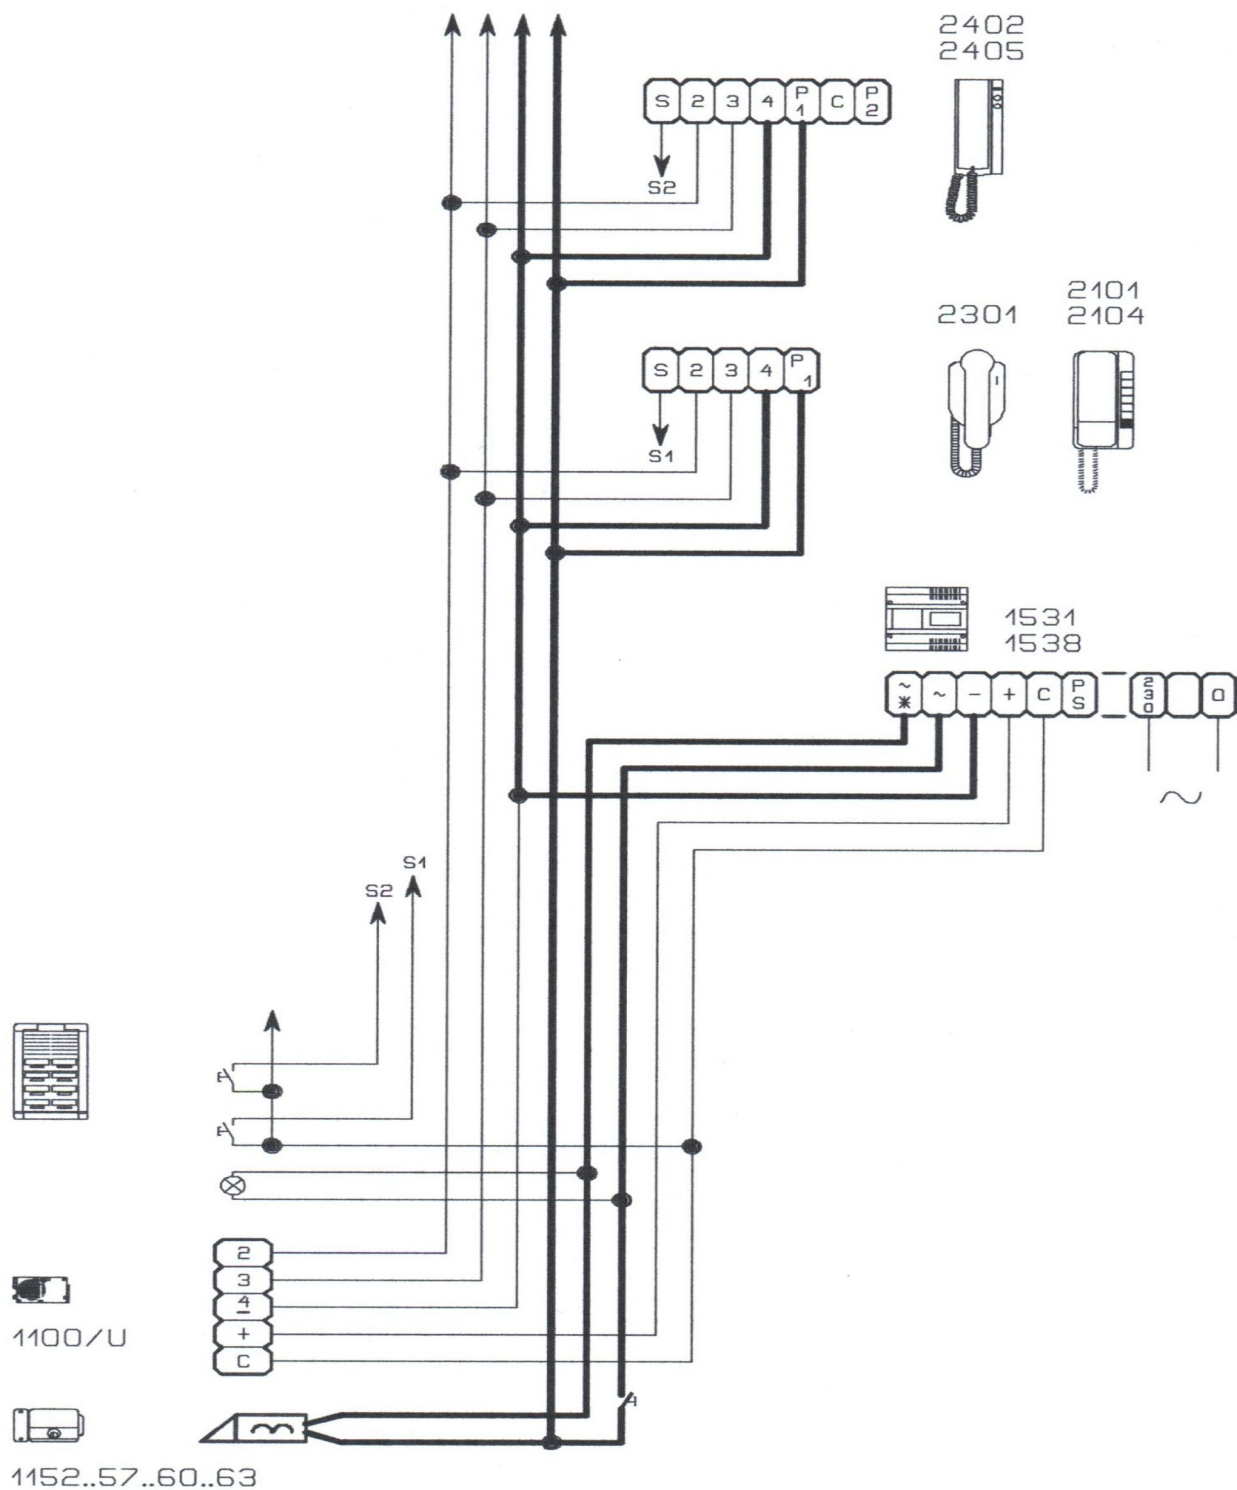

WIRING DIAGRAM

Comelit 2402W-2405W 2 Entrance 5 Wire

